


PowerLite™ Compressor

AKHL1250E

**HIGH PRESSURE COMPRESSOR
COMPRESSEUR À HAUTE PRESSION
COMPRESOR DE ALTA PRESIÓN**

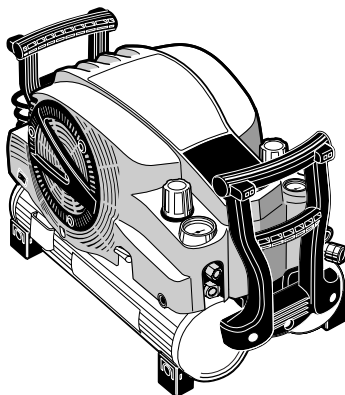

**OPERATING AND MAINTENANCE MANUAL
MANUEL D'UTILISATION ET D'ENTRETIEN
MANUAL DE OPERACIONES Y MANTENIMIENTO**



WARNING

**BEFORE USING THIS COMPRESSOR, STUDY THIS MANUAL TO ENSURE SAFETY WARNING AND INSTRUCTIONS.
KEEP THESE INSTRUCTIONS WITH THE TOOL FOR FUTURE REFERENCE.**



AVERTISSEMENT

**AVANT D'UTILISER CE COMPRESSEUR, LIRE CE MANUEL ET LES CONSIGNES DE SÉCURITÉ AFIN DE GARANTIR UN FONCTIONNEMENT SÛR.
CONSERVER CE MANUEL EN LIEU SÛR AVEC L'OUTIL AFIN DE POUVOIR LE CONSULTER ULTÉRIEUREMENT.**



ADVERTENCIA

**ANTES DE UTILIZAR ESTE COMPRESOR, LEA DETENIDAMENTE LAS INSTRUCCIONES Y ADVERTENCIAS DE SEGURIDAD.
GUARDE ESTAS INSTRUCCIONES CON LA HERRAMIENTA PARA UNA POSIBLE CONSULTA FUTURA.**

INDEX TABLE DES MATIÈRES ÍNDICE

ENGLISH	Page	5	to	18	Page
FRANÇAIS	Page	19	to	32	Page
ESPAÑOL	Page	33	to	46	Page

DEFINITIONS OF SIGNAL WORDS

- WARNING:** Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.
- CAUTION:** Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.
- NOTE:** Emphasizes essential information.

DEFINITIONS DES INDICATEURS PRINCIPAUX

- AVERTISSEMENT:** Indique une situation potentiellement à risque qui, si elle n'est pas évitée, peut résulter en un danger mortel ou une blessure grave.
- ATTENTION:** Indique une situation potentiellement à risque qui, si elle n'est pas évitée, peut résulter en une blessure mineure ou modérée.
- REMARQUE:** Accentue les informations essentielles.

DEFINICIONES DE LOS INDICADORES PRINCIPALES

- ADVERTENCIA:** Indica una situación potencialmente peligrosa que, si no se evita, puede resultar en muerte o lesiones graves.
- PRECAUCIÓN:** Indica una situación potencialmente peligrosa, que si no se evita, puede resultar en una herida menor o moderada.
- NOTA:** Destaca las informaciones esenciales.

Fig.A

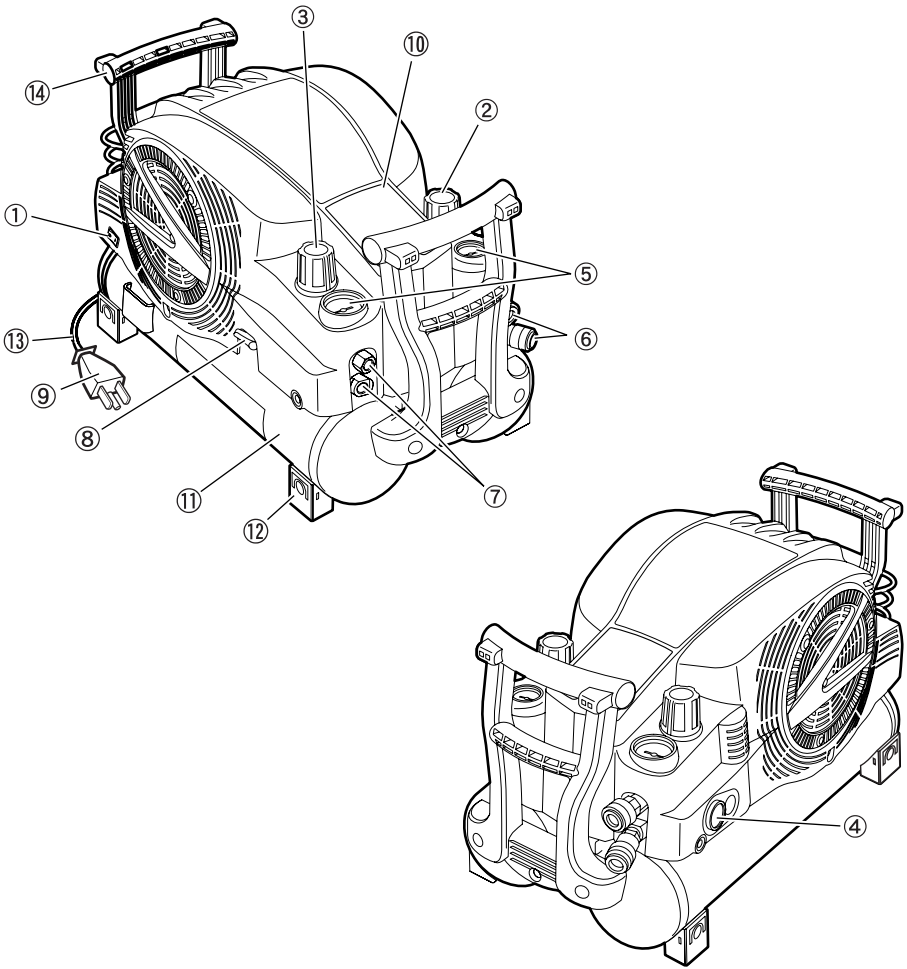


Fig.B

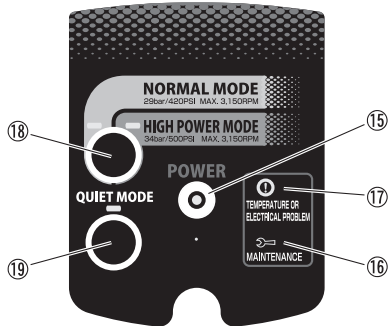


Fig.C

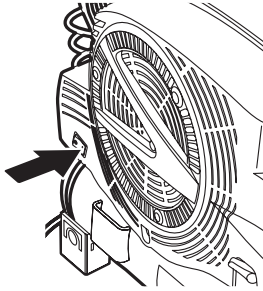


Fig.D

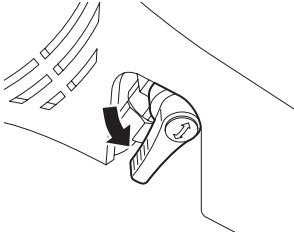


Fig.E

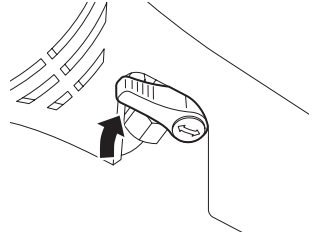


Fig.F




Fig.G

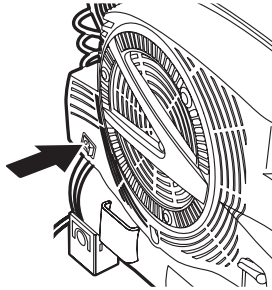


Fig.H

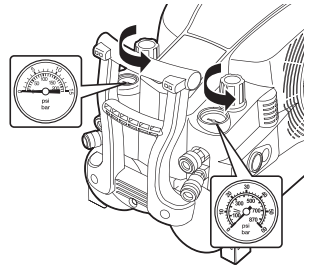


Fig.I

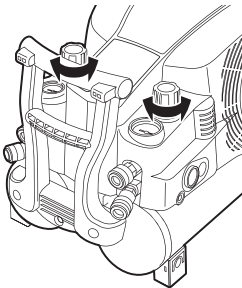


Fig.J

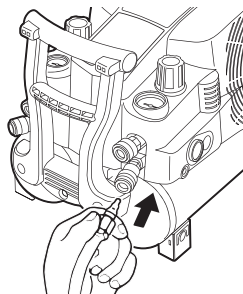


Fig.K






Fig.L



OPERATING AND MAINTENANCE MANUAL

INDEX

1. SAFETY INSTRUCTIONS 6
2. SPECIFICATIONS AND TECHNICAL DATA 10
3. INSTRUCTIONS FOR OPERATION 10
4. PROTECTIVE DEVICE..... 16
5. ABNORMALITIES DURING OPERATION..... 16
6. BUZZER TYPES..... 17
**7. AUTOMATIC ADJUSTMENT OF OPERATING POWER
(INVERTER CONTROL)..... 18**
8. IN ORDER TO MAINTAIN PERFORMANCE..... 18

 **BEFORE USING THIS COMPRESSOR, STUDY THIS MANUAL TO ENSURE SAFETY WARNING AND INSTRUCTIONS. KEEP THESE INSTRUCTIONS WITH THE TOOL FOR FUTURE REFERENCE.**
WARNING



READ ALL SAFETY WARNINGS AND ALL INSTRUCTIONS.

Failure to follow the warnings and instructions may result in death serious injury. Save all warnings and instructions for future reference.



RISK OF ELECTRIC SHOCK

WARNING: Before doing any work on the compressor it must be disconnected from the power supply.



RISK OF HIGH TEMPERATURES

CAUTION: The compressor contains some parts which might reach high temperatures.



RISK OF ACCIDENTAL START-UP

CAUTION: The compressor could start automatically in case of a black-out and subsequent reset.



DO NOT USE IN THE RAIN

Using the compressor in these or similar conditions will increase the risk of electric shock, dangerous malfunction, and overheating.



1. WEAR SAFETY GLASSES OR GOGGLES

Danger to the eyes always exists due to the possibility of dust being blown up by the exhausted air or of a fastener flying up due to the improper handling of the tool. For these reasons, safety glasses or goggles shall always be worn when operating the tool.

The employer and/or user must ensure that proper eye protection is worn. Eye protection equipment must conform to the requirements of the American National Standards Institute, ANSI Z87.1 (Council Directive 89/686/EEC of 21 DEC. 1989) and provide both frontal and side protection.

The employer is responsible to enforce the use of eye protection equipment by the tool operator and all other personnel in the work area.

NOTE: Non-side shielded spectacles and face shields alone do not provide adequate protection.



2. EAR PROTECTION MAY BE REQUIRED IN SOME ENVIRONMENTS

As the working condition may include exposure to high noise levels which can lead to hearing damage, the employer and user should ensure that any necessary hearing protection is provided and used by the operator and others in the work area.

1. SAFETY INSTRUCTIONS



WARNING

TO AVOID SEVERE PERSONAL INJURY OR PROPERTY DAMAGE BEFORE USING THE TOOL, READ CAREFULLY AND UNDERSTAND THE FOLLOWING "SAFETY INSTRUCTIONS": FAILURE TO FOLLOW WARNINGS COULD RESULT IN DEATH OR SERIOUS INJURY.

PRECAUTIONS ON USING THE COMPRESSOR

IMPORTANT INFORMATION

Most accidents that result from compressor operation and maintenance are caused by the failure to observe basic safety rules or precautions. An accident can often be avoided by recognizing a potentially hazardous situation before it occurs, and by observing appropriate safety procedures. Basic safety precautions are outlined in the "SAFETY" section of this Instruction Manual and in the sections which contain the operation and maintenance instructions.

Hazards that must be avoided to prevent bodily injury or machine damage are identified by WARNINGS on the compressor and in this Instruction Manual.

Never use this compressor in a manner that has not been specifically recommended by manufacturer, unless you first confirm that the planned use will be safe for you and others.

DEATH OR SERIOUS BODILY INJURY COULD RESULT FROM IMPROPER OR UNSAFE USE OF COMPRESSOR. TO AVOID THESE RISKS, FOLLOW THESE BASIC SAFETY INSTRUCTIONS. HIGH PRESSURE COMPRESSOR PROVIDES BOTH HIGH PRESSURE AND REGULAR PRESSURE AIR. FOR USAGE OF HIGH PRESSURE AIR, HIGH PRESSURE COMPRESSOR IS DESIGNED ONLY FOR MAX POWERLITE NAILERS AND POWERLITE HOSE. UNSPECIFIED USAGE WILL CAUSE SERIOUS ACCIDENTS.

1. NEVER TOUCH MOVING PARTS
Never place your hands, fingers or body parts near the compressor's moving parts.

2. NEVER OPERATE WITHOUT ALL GUARDS IN PLACE
Never operate the compressor without all guards or safety features in place and in proper working order. If maintenance or servicing requires the removal of a guard or safety features, be sure to replace the guards or safety feature before re-summing operation of the compressor.



3. ALWAYS WEAR EYE PROTECTION
Always wear safety goggles or equivalent eye protection. Compressed air must never be aimed at anyone or any part of the body. Be sure to wear protective gear including the sound-proofing and protective garment, crash cap and safety footwear suited for the given working environment.

4. PROTECT YOURSELF AGAINST ELECTRIC SHOCK
Prevent body contact with grounded surfaces such as pipes, radiators, ranges and refrigeration enclosures. Never operate the compressor in damp or wet locations.

5. DISCONNECT THE COMPRESSOR
Always disconnect the compressor from the power plug and remove the compressed air from the air tank before servicing, inspecting, maintaining, cleaning, replacing or checking any parts.

6. AVOID UNINTENTIONAL STARTING
Do not carry the compressor while it is connected to its power source or when the air tank is filled with compressed air. Be sure the knob of the pressure switch in the "OFF" position before connecting the compressor to its power source.

7. STORE COMPRESSOR PROPERLY
When not in use, the compressor should be stored in dry place. Keep out of reach of children. Lock-out the storage area.

8. KEEP WORK AREA CLEAN
Cluttered areas invite injuries. Clear all work areas of unnecessary tools, debris, furniture, etc.

9. KEEP CHILDREN AWAY
Do not let visitors contact compressor extension cord. All visitors should be kept safely away from work area. Keep out of reach of children.

10. DRESS PROPERLY
Do not wear loose clothing or jewelry. They can be caught in moving parts. Wear protective hair covering to contain long hair.

11. DON'T ABUSE POWER CORD
Never yank it to disconnect from receptacle. Keep power cord from heat, oil and sharp edges.

12. MAINTAIN COMPRESSOR WITH CARE
Follow instructions for lubricating. Inspect cords periodically and if damaged, have repaired by authorized service facility.

13. USE A SAFE EXTENSION CORD
In order to prevent an electric shock, use a 3-core extension cord with a 3-pole earthing plug and a 3-core earthing plug socket. Make sure that the extension cord is in the good working condition. If the cord is damaged, replace or repair it. The cord should have a sufficient capacity for the current running to the product. The cord of an insufficient capacity will cause a voltage drop or an electric power loss, resulting in overheating. The following table shows the cord size used depending on the cord length.
If the compressor is to be used outdoors, use an exclusive extension cord.

Tab.1 GAUGE A MAX LENGTH OF 50ft. (15m)

COMPRESSOR	HP	kW	American Wire Gauge
AKHL1250E	2	1.5	12



WARNING

Avoid electrical shock hazard. Never use this compressor with a damaged or frayed electrical cord or extension cord. Inspect all electrical cords regularly. Never use in near water or in any environment where electric shock is possible.

14. STAY ALERT
Watch what you are doing. Use common sense. Do not operate compressor when you are tired. Compressor should never be used by you if you are under the influence of alcohol, drugs or medication that makes you drowsy.

15. CHECK DAMAGED PARTS AND AIR LEAK

Before further use of the compressor, a guard or other part which is damaged should be carefully checked to determine that it will operate properly and perform its intended function.

Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, air leak, and any other conditions that may affect its operation.

A guard or other part that is damaged should be properly repaired or replaced by an authorized service facility unless otherwise indicated elsewhere in this Instruction Manual.

Have defective pressure controllers replaced by authorized service facility.

Do not use compressor if switch does not turn it on and off.

16. OPERATE COMPRESSOR CORRECTLY

Operate the compressor according to the instructions provided herein. Never allow the compressor to be operated by children, individuals unfamiliar with its operation or unauthorized personnel.

17. KEEP ALL SCREWS, BOLTS AND COVERS TIGHTLY IN PLACE

Keep all screws, bolts, and plates tightly mounted.

Check their conditions periodically.

18. KEEP MOTOR AIR VENT CLEAN

The motor air vent must be kept clean so that air can freely flow at all times. Check for dust build-up frequently.

19. OPERATE COMPRESSOR AT THE RATED VOLTAGE

Operate the compressor at voltages specified on their nameplates. If using the compressor at a higher voltage than the rated voltage, it will result in abnormally fast motor revolution and may damage the unit and burn out the motor.

20. NEVER USE A COMPRESSOR WHICH IS DEFECTIVE OR OPERATING ABNORMALLY

If the compressor appears to be operating unusually, making strange noises, or otherwise appears defective, stop using it immediately and arrange for repairs by an authorized service facility.

21. DO NOT WIPE PLASTIC PARTS WITH SOLVENT

Solvent such as gasoline, thinner, benzene, carbon tetrachloride, and alcohol may damage and crack plastic parts. Do not wipe them with such solvents. Wipe plastic parts with a soft cloth lightly dampened with mild detergent and dry thoroughly.

22. USE ONLY GENUINE REPLACEMENT PARTS

Replacement parts not original may void your warranty and can lead to malfunction and resulting injuries. Genuine parts are available from your dealer.

23. DO NOT MODIFY THE COMPRESSOR

Do not modify the compressor. Always contact the authorized service facility any repairs. Unauthorized modification may not only impair the compressor performance but may also result in accident or injury to repair personnel who do not have the required knowledge and technical expertise to perform the repair operations correctly.

24. TURN OFF THE SWITCH WHEN THE COMPRESSOR IS NOT USED

When the compressor is not used, turn the switch OFF, disconnect the plug from the power source and open the drain cock to discharge the compressed air from the air tank.



25. NEVER TOUCH THE SURFACE OF THE HIGH-TEMPERATURE SECTION

In order to prevent a burn, do not touch the piping, head, cylinder, motor, tank and inverter case (lower cover).

26. DO NOT DIRECT AIR STREAM AT BODY

Risk of injury, do not direct compressed air at persons or animals.

27. DRAIN TANK

Drain tank daily or after 4 hours of use.

28. DO NOT STOP COMPRESSOR BY PULLING OUT THE PLUG

Use the " ON/OFF " switch.

29. WHENEVER USING THE HIGH PRESSURE SIDE OF THE MAX POWERLITE COMPRESSOR, THE GENUINE PARTS FOR THE MAX POWERLITE TOOLS, POWERLITE HOSE AND COMPRESSOR MUST BE USED.

30. NEVER USE A TRANSFORMER FOR THE POWER SUPPLY OF THIS COMPRESSOR. USING A TRANSFORMER TO INCREASE THE VOLTAGE WILL CAUSE A FAILURE OR BURNOUT. (IF A TRANSFORMER IS USED, OPERATION OF THE MACHINE WILL STOP.)

31. NEVER CONNECT THE COMPRESSOR TO AN ENGINE GENERATOR OR DIRECT-CURRENT POWER SUPPLY

The compressor will break or be damaged from burning.

32. THIS COMPRESSOR IS FOR INDOOR USE. DO NOT INSTALL THE COMPRESSOR IN ANY PLACE EXPOSED TO RAIN OR SPLASHED WATER, HIGH-HUMIDITY PLACE OR HIGH-TEMPERATURE PLACE

If used in the wet condition, it could produce an electric shock or be short-circuited, resulting in ignition. Use it under the environmental conditions provided by its specifications.

33. DO NOT OPERATE THE TOOL NEAR A FLAMMABLE SUBSTANCE

Never operate the tool near a flammable substance (e.g., thinner, gasoline, etc.). Volatile fumes from these substances could be drawn into the compressor and compressed together with the air and this could result in an explosion.

34. NEVER USE THE TOOL IN AN EXPLOSIVE ATMOSPHERE

Sparks from the tool may ignite atmospheric gases, dust or other combustible materials.

35. BE SURE TO EARTH THE COMPRESSOR

Earth the compressor to prevent a worker from getting an electric shock. It comes with a 3-pole cord and a 3-pole earthing plug so that it can be connected to an appropriate earthing plug socket.

A green-and-yellow striped wire is an earthing conductor. Never connect it to other charged terminals.

36. WHEN CARRYING THE COMPRESSOR, HOLD IT CORRECTLY.

37. TAKE CARE TO TRANSPORT THE COMPRESSOR CORRECTLY, DO NOT OVERTURN IT OR LIFT IT WITH HOOKS OR ROPES.

38. WHEN DISPOSING THE MACHINE OR ITS PARTS, FOLLOW THE RELEVANT NATIONAL RULES.

39. DO NOT PUT FINGERS IN THE BLEEDER OR CLEARANCES IN THE HOUSING.

This can result in injury, electric shock or burns.

40. DO NOT USE ANY ADAPTER PLUGS WITH THE COMPRESSOR

The compressor is factory-equipped with a specific electric cord and plug for connection to a proper electric power source. Never modify the plug in any way. Donot use any adapter plugs with the compressor.

2. SPECIFICATIONS AND TECHNICAL DATA

1. SPECIFICATIONS

Product No.	AKHL1250E
Weight	41.4 lbs (18.8 kg)
Power supply	AC 115V±10% 60 Hz±1% ϕ1
Rated current	12 A
Motor power	2HP
Protective earthing	Class I
Protective structure	IP20
Working temperature	32 °F to 104 °F (0 °C to +40 °C)
Working humidity	85 % RH or less. No dew condensation.
Height above sea level	3,280 ft (1,000 m)
Storage temperature	14 °F to 122 °F (-10 °C to +50 °C)
Storage humidity	85 % RH or less. No dew condensation.
Pressure switch working range	Off:500 psi (34 bar)/On:435 psi (30 bar) (POWER MODE) Off:420 psi. (29 bar)/On:360 psi (25 bar) (NORMAL MODE)

3. INSTRUCTIONS FOR OPERATION

Unpack the compressor and check for any deficiency, damage caused during transportation and loose bolts and screws.



WARNING

READ SECTION TITLED " SAFETY INSTRUCTIONS "

WEAR SAFETY GLASSES OR GOGGLES

Danger to the eyes always exists due to the possibility of dust being blown up by the exhausted air or of a fastener flying up to the improper handling of the tool. For these reasons, safety glasses or goggles shall always be worn when operating the tool.

The employer and/or user must ensure that proper eye protection is worn. Eye protection equipment must conform to the requirements of Council Directive 89/686/EEC of 21 DEC. 1989 (the American National Standards Institute. ANSI Z87.1) and provide both frontal and side protection.

NOTE: Non-side shielded spectacles and face shields alone do not provide adequate protection.

NOTE: The information contained in this Instruction Manual is designed to assist you in the safe operation and maintenance of the compressor.

Some illustrations in this Instruction Manual may show details or attachments that differ from those on your own compressor.

1. INSTALLATION



WARNING

1. NEVER USE THE MACHINE IN A PLACE WHERE ANY VOLATILE COMBUSTIBLE SUBSTANCE HAS BEEN STORED.

Never use it near gasoline, thinner, gas, paint or adhesive agent, because they could be ignited or blow up.



WARNING

2. NEVER USE THE MACHINE NEAR THE HEAT OF FIRE OR ANY COMBUSTIBLE SUBSTANCE.



WARNING

3. NEVER USE THE MACHINE IN AN UNSTABLE PLACE.

Never use it in a place where it could move or fall of itself.

Be sure to install the compressor on a flat floor, with leg rubber underneath it; the allowable tilt angle of the floor is up to 10 degrees. If the installation floor is tilted and slippery, ensure that the compressor does not move during operation. Do not use it on a shelf or a stand where it may fall or tumble.



WARNING

4. AVOIDING A PLACE EXPOSED TO HIGH TEMPERATURE OR THE DIRECT SUNSHINE, BE SURE TO USE THE MACHINE IN THE WELL-VENTILATED SHADE.

Using it under high temperature or in the direct sunshine not only deteriorates its durability, but increases the temperature of the main body, causing danger to your safety. Be sure to use it in the well-ventilated shade. The adequate room temperature is 41 °F to 86 °F (+5 °C to +30 °C). (32 °F to 104 °F (0 °C to +40 °C) at maximum)



WARNING

- 5. DO NOT INSTALL THE MACHINE IN A DUSTY(WOODEN CHIPS, ETC.) PLACE.**
- 6. INSTALL THE MACHINE IN THE APPROPRIATE DIRECTION.**
Install it appropriately.



WARNING

7. NEVER INSTALL THE MACHINE IN THE RAIN OR IN A PLACE SPLASHED WITH WATER OR EXPOSED TO HIGH TEMPERATURE.

Using it in the wet condition could cause an electric shock or a short-circuit, resulting in a fire due to burnout or ignition.



WARNING

8. NEVER BLOCK A VENTILATION OPENING OR USE THE MACHINE IN A BOX OR A NARROW PLACE(IN A VEHICLE, ETC.)

Neglect of this may generate abnormal heat, causing a trouble or an accident. Install the compressor at the distance of 1 m or more from the wall to secure sufficient ventilation and cooling.



WARNING

9. NEVER SIT OR PLACE AN OBJECT ON THE TOP OF THE MACHINE.

Neglect of this could cause a trouble or break it.



WARNING

Do not use the compressor in any place where the temperature is 32 °F (0 °C) or less or the ambient temperature exceeds 104 °F (+40 °C).

2. NAME OF PARTS (See Fig.A)

Description of Functions of Key Components

①	Power switch	Turns on or off the power supply
②	Pressure-Reduction valve adjustment handle (H) (Orange cap)	Intended for exclusive use with the <i>PowerLite</i> tool. It adjusts the operating pressure of the <i>PowerLite</i> tool.
③	Pressure-Reduction valve adjustment handle (L) (Yellow cap)	Adjusts the pressure supplied to the general-purpose nailers and pneumatic tools (operating air pressure 120 psi (8.3 bar) maximum).
④	Pressure gauge in the tank	Indicates pressure in the tank. The pressure increases up to 500 psi (34 bar).
⑤	Pressure gauge for indicating the set reduction valve pressure (2 gauges)	It indicates the set pressure on the pressure-reduction valves (H) and (L). (355 psi (24.5 bar) maximum on the H side and 120 psi (8.3 bar) maximum on the L side.)
⑥	High pressure air chuck (for MAX <i>PowerLite</i> tools)	It connects the MAX <i>PowerLite</i> air hose for the <i>PowerLite</i> tools.
⑦	General-purpose air chuck (for regular pressure tools)	It connects the air hose for the general-pressure nailers. Fix the General-purpose air chuck in this nipple: NPT 1/4" (for regular pressure tools). Ask your dealer or an authorized service facility to fix it.
⑧	Drain cock	It drains compressed air and water, Drain once when the work is finished or more a day.
⑨	Power plug	It is usable with a triode ground outlet.
⑩	Control panel	It allows switching the mode between Normal, High Power and Quiet. (See Fig.B) For details of the LEDs and switches on the Control panel, see "Control Panel" on page 13. <ul style="list-style-type: none"> • Current consumption is reduced in the operation in Quiet mode.
⑪	Air tank	
⑫	Rubber foot	
⑬	Power cord	
⑭	Grip for two-handed carry	

Control Panel (See Fig.B)

⑮ POWER LED

⑯ MAINTENANCE LED

If it is lit up, send the machine to your dealer or an authorized service facility for inspection. (See page 18)

⑰ TEMPERATURE OR ELECTRICAL PROBLEM LED

See the buzzer types in Chapter 6. (See page 17)

⑱ SELECTOR SWITCH

The selector switch allows switching among the following operating modes.

The factory default is 25-29 Normal mode.

Operating mode	Pressure control range		Application example
	ON pressure	OFF pressure	
NORMAL MODE	360 psi (25 bar)	420 psi (29 bar)	Joinery work by MAX <i>PowerLite</i> tools, general-purpose nailers, etc.
HIGH POWER MODE	435 psi (30 bar)	500 psi (34 bar)	Continuous surface fastening and the like with MAX <i>PowerLite</i> tools.

- Before using the control panel, remove the transparent sheet covering it on the shipped machine.

⑲ QUIET MODE SWITCH

This machine also offers a power-saving operation Quiet mode that you can select when you want to suppress the noises accompanying the operation, or when tripping of the circuit breaker is anticipated during continuous operation. Press the Quiet mode switch to turn on this mode.

- A buzzer sounds with a beep and the LED lights up when the operation switching takes place.
- The switching is available independent of whether the compressor is in operation or stopped.
- Even when the circuit breaker tripped or you have disconnected the power plug from the outlet during operation, status of the last operation is stored in memory.
- Even when the Quiet mode switch is pressed in a low temperature environment, the compressor continues running in the Normal mode until it reaches the OFF pressure. After the compressor is fully warmed, it shifts to the Quiet mode the next time it is used.

3. MACHINE OPERATING PROCEDURE

Inspection and checkup prior to operation



WARNING

- Prior to use, check the bolts and nuts for loosening and the parts for missing one.
- The power supply used must AC 115V 15 A and provided with a circuit breaker. Allowable source voltage range is +/-10%.
- Gauge and length of the extension cord or drum cord used must be AWG 12 minimum and 50 ft. (15m) maximum, respectively. And the cord must be fully drawn out when used.
- Make sure the machine is installed in the right direction when using it.

- * Use the machine in compliance with the instructions provided in "SAFETY INSTRUCTIONS" on page 6.
- * Pressure values in the description do not include the error in reading the pressure gauge.

1. **After turning off the machine power switch, connect the power plug to the outlet.**
 - When using an extension cord or drum cord, make sure its effective gauge and length are AWG 12 minimum and 50 ft. (15m) maximum, respectively.
2. **(Fig.C,D) Turn the power switch on while maintaining the drain cock fully open. The buzzer sounds with a beep at the same time.**
 - For buzzer sounding patterns, see page 17.
3. **Make sure that the motor starts to run and the air is leaking from the drain cock when the drain cock is open.**
4. **(Fig.E) Close the drain cock and make sure no air is leaking from the cock.**

5. Turn the adjustment handle (in 2 locations) of the pressure-reduction valve fully clockwise until you cannot move it anymore and make sure that the above operation moves the pressure gauge pointer (Fig.F) at both locations.



CAUTION

- As the pressure in the air tank increases due to the pressure characteristic of the pressure-reduction valve, the pressure can vary from the set supply pressure by as much as 29 psi (2 bar).
Turn the pressure-reduction valve's adjustment handle counterclockwise once to reduce the pressure and then proceed to the adjustment while increasing the pressure by turning the adjusting hand clockwise.
6. **Make sure that the compression operation is automatically stopped in 6 to 7 minutes. Except when the power-saving operation in Quiet mode is turned on, auxiliary tank is connected or voltage drop occurred, since these extends the operating hours.**
 7. **Wait for 5 minutes after the operation is stopped to confirm that there are no abnormal noises or air leakages and that the compressor does not restart.**
 8. **(Fig.D) Discharge the compressed air by opening the drain cock somewhat. Make sure that the operation is resumed due to a decrease in the pressure.**
 9. **(Fig.E,G) Close the drain cock and turn the power off while the compression operation is turned on to make sure that these actions stop the machine from operating.**
 10. **(Fig.H) Turn the adjustment handle (in 2 locations) of the pressure-reduction valve counterclockwise to make sure that this turning moves the pressure gauge pointer downward at both locations. (You may hear sounds due to air leaking but it does not mean there is a failure.)**

11. (Fig.D) Open the drain cock to discharge all the compressed air and water in the air tank.

If you found any abnormalities in the check-up or inspection prior to the operation, send the machine to your dealer or authorized service facility for inspection or repair.

Operating Procedure

Before operating the machine, be sure to carry out the "Inspection and checkup prior to operation" described on page 14.

- 1. Fully open the drain cock and turn the power switch on. The buzzer will sound with a beep at the same time.**
 - For buzzer sounding patterns, see page 17.
After the operation has started, close the drain cock tight to increase the pressure.
- 2. (Fig.I) After confirming the operation has stopped due to the increased pressure, turn the adjustment handle of the pressure-reduction valve to adjust the operating pressure of the nailer and pneumatic tool to the appropriate level. When adjusting the pressure, turn the pressure-reduction valve's adjustment handle counterclockwise to set the pressure at a level lower than the appropriate value by 2 bars once. Then proceed to the adjustment while increasing the pressure by turning the handle clockwise.**
 - Make sure to start the adjustment at a level lower than the appropriate pressure and continue the adjustment while increasing the pressure from that level upward. If you start the adjustment from a level higher than the appropriate value, an error results between the pressure gauge value and actually used pressure. (Due to Characteristics of pressure-reduction valve respectively)
 - 2 pressure-reduction valves provided on this machine allow you to connect MAX *PowerLite* and the general-purpose nailer or pneumatic tool.
<Pressure-reduction valve H> Allows connection and use of MAX PowerLite tools (of operating pressure of 355 psi (24.5 bar) maximum)
<Pressure-reduction valve L> Allows connection and use of the general-purpose nailers or pneumatic tools (of operating pressure of 120 psi (8.3 bar) maximum)



WARNING

- You must observe the specified operating air pressure for the nailers and pneumatic tools.**
Using a nailer or pneumatic tool without adjusting the supply pressure with the reduction valve can seriously degrade their performance, induce their premature aging or damage them.
 - Using a nailer or pneumatic tool at an inappropriate pressure level (at an unnecessary high pressure) increases their air consumption, potentially degrading their capability in continuous work. Be sure to use them at the appropriate pressure.
- 3. (Fig.J) After you have finished with the adjustment of supply pressure, you can start the operation by connecting the air hose to the air outlet (air chuck).**
 - 4. Connect the high pressure hose to the high pressure air hose for MAX PowerLite tools to the high pressure air chuck on the H side of the pressure-reduction valve.**
Connect the air hose for the general-purpose nailer to the air chuck on the L side of the pressure-reduction valve.
 - The air chuck is the one-touch type, allowing you to connect the air plug to the air chuck just by pushing in.



WARNING

- Before connecting the air hose to this compressor, make sure that the air hose and hose fixture are firmly secured.**
- 5. OPERATION MODE**
Operation mode switching on this machine is carried out by the selector switch. Select a desired mode from those listed in the table on page 13 according to the given application.

4. PROTECTIVE DEVICE

If internal heat builds up during operation due to clogging of the airflow orifice, if the machine is used in a highly heated environment or if an abnormality occurs inside the machine, the thermal protector for preventing burnout may be activated to stop the motor operation. The buzzer will sound in this case. In such a case:

1. **(Fig.G,K) Turn the power switch off and disconnect the power plug from the outlet.**
 - For buzzer sounding patterns, see page 17.
2. **(Fig.C,L) Connect the power plug to the outlet and turn the power switch on to resume the operation.**
 - If the motor has sufficiently cooled down, the resumed operation may activate the protective device soon after. In other cases, the operation may not resumed when you turned the power switch on. In such a case, wait for about 30 minutes for the motor to cool down before restarting the machine.



WARNING

3. **If the protective device was activated when there were no apparent problems existing in the operating environment, stop using the compressor and send it to your dealer or authorized service facility for checkups or repairs.**

5. ABNORMALITIES DURING OPERATION



WARNING

- **If you detect any abnormalities, do not operate the compressor.**

If you encounter any of the following abnormal phenomena, turn off the power switch immediately, disconnect the power plug from the outlet and send the machine to your dealer or authorized service facility for checkups or repairs.

1. **The following problems may occur even when there are no problems with the power supply or wiring: (See "PROTECTIVE DEVICE" on page 16.)**
 - Turning on the power switch does not start up the machine.
 - Motor vibration is generated
2. **Abnormal sounds are generated during operation. (See "AUTOMATIC ADJUSTMENT OF OPERATING POWER" (INVERTER CONTROL) on page 18.)**
3. **The safety valve instead of the pressure sensor is activated, allowing the compressed air to blow out.**
4. **Air leakage happens.**
5. **Pressure does not increase. (See page 18)**
6. **An electrical shock-like pain is felt when touched the metal part.**
7. **Other abnormalities than the above that is recognized during operation.**

6. BUZZER TYPES

In normal operation

Buzzer sounds	Symptom	Actions taken
A one-time short beep sound (Pi)	At powering on	-
	When the operating mode is switched	-

In cases of abnormal operation

	Buzzer sounds	TEMPERATURE OR ELECTRICAL PROBLEM LED (LED)	Cause	Actions taken
①	None	Lighting up	Voltage is too low or high	Examine the state of the power supply (See page 18)
	Short beep sounds (Pi, Pi, Pi, ...) * refer to the below i)~iv)			
②	Long beep sounds (Pii, Pii, Pii, ...)	Lighting up	<ul style="list-style-type: none"> Motor temperature went abnormally high Temperature in the control circuit has built up to an abnormally high level (LED remains lighting up.) 	<ul style="list-style-type: none"> Do not use the compressor in extremely high temperatures. Do not clog the airflow orifice. Examine the state of the power supply (See page 18) Do not use the compressor in a place where it can be splashed with water or in a highly humid place.
③	Short beep beeping sounds (Pi, Pi, Pi, ...) * refer to the below v)	Blinking	<ul style="list-style-type: none"> Motor does not run Failure in the control circuit (LED remains blinking.) 	It is due to a failure on the inverter or motor. Send the machine to your dealer or authorized service facility to have their checkup or repair.

- i) If an excessively low voltage state (80 V or below) is continued for 4 seconds or longer, LED remains lighting up even after the voltage has been recovered.
- ii) If the voltage drops down to a low voltage level of 65 V or below, LED remains lighting up with short beep sounds (Pi, Pi, Pi, ...), until power switch is turned off.
If the voltage drops down further and motor stops with error, LED also remains lighting up with short beep sounds (Pi, Pi, Pi, ...), until power switch is turned off.
- iii) If an excessively high voltage state (155 V or over) is continued for 2 seconds or longer, LED lights up without beep sounds. LED is turned off after the voltage drops down under 155 V.
- iv) If the voltage increases to a high voltage level of 165 V or over for 2 seconds or longer, motor stops automatically and LED remains lighting up with long beep sounds (Piii), until power switch is turned off.
- v) In other cases of abnormal motor stop automatically, LED remains lighting up with intermittent long beep sounds (Pi, Pi, Pi, ...), until power switch is turned off.

7. AUTOMATIC ADJUSTMENT OF OPERATING POWER (INVERTER CONTROL)

Microcomputer-based inverter control is enabled on this machine in order to ensure the maximum utilization of the discharging performance. Adjustment of the operating power is automatically continued until the pressure in the machine tank reaches the maximum level being set for the currently set mode. Operating sounds may change when the operating power is switched, but you do not have to worry about them. Changes in the sounds are not due to a failure.

- The pressure level at which the output change-over is activated varies depending on the capacity of the main power supply, type of extension cord used and parallel use of other electric equipment. If the voltage is excessively low, extra time will be required for the filling.
- If the fill time is longer than usual or when the pressure does not increase, change the current connection to the power supply (reconnect to the main power supply) or stop the joint use of the power supply with a power tool.
- When capacity of the main power is AC 115V or less, or when it is jointly used with another power tool, a radical voltage drop results, inducing startup failure.
- The circuit breaker of the power supply may be activated if the total current consumption resulting from the parallel use with another power tool exceeds the current capacity of the circuit breaker.

If the circuit breaker trips, the power supply switch of the compressor moves to the OFF position.

Stop using other power tools on the same power source as the compressor or stop using an extension cord and connect the compressor directly to the power source. Then, after waiting for 30 seconds or more, turn the switch ON.

8. IN ORDER TO MAINTAIN PERFORMANCE

1. Drain water from the machine.

After the work is finished, turn the handle of the pressure-reduction valve clockwise and open the drain cock gradually to drain the compressed air and water in the air tank until the pressure gauge pointer of the pressure-reduction valve points to 0.

- **Not draining the water will result in the inside of the air tank becoming moldy, potentially leading to a failure.**

2. (Fig.B17) The Maintenance LED lights up or flashes.

Operating hours of this machine are measured with a microcomputer. The MAINTENANCE LED lights up as the machine operating hours reaches 1000 hours. If the Maintenance LED lights up, send the machine to your dealer or an authorized service facility for inspection.

3. Implement the machine inspection on a regular basis.

The User is requested to implement cleaning and inspection of the machine in order to maintain its performance. Please do not hesitate to let your dealer or authorized service facility inspect your machine.

4. Handle this machine carefully.

Dropping the machine inadvertently, bumping it against solid objects or hitting it can cause deformation, cracks or damage to the machine. The User is advised not to invite an accident by dropping, bumping or hitting the machine.

5. Inspect the machine every time you use it.

Check and inspect the machine in conformance with the procedure described in the SAFETY INSTRUCTIONS provided on page 6 and after.

6. ABOUT PRODUCTION YEAR

This product bears production number in the RATING LABEL. The two digits of the number from left indicates the production year.

(Example)

08826035D

↑
Year 2008

- The content of this manual might be changed without notice for improvement.
 - Le contenu de ce manuel est sujet à modification sans préavis à des fins d'amélioration.
 - El contenido de este manual se puede modificar sin previo aviso para su mejora.
-
- The specifications and design of the products in this manual will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.
 - Les caractéristiques et la conception des produits mentionnés dans ce manuel sont sujettes à des modifications sans préavis en raison de nos efforts continus pour améliorer la qualité de nos produits.
 - Las especificaciones y el diseño de los productos de este manual estarán sujetos a modificación sin previo aviso debido a nuestros continuos esfuerzos para mejorar la calidad de nuestros productos.

MAX CO.,LTD.

MAX USA CORP.
257 East 2nd Street
Mineola, NY 11501, U.S.A.
TEL: 1-800-223-4293
FAX: (516)741-3272

www.maxusacorp.com (USA Site)
wis.max-ltd.co.jp/int/ (GLOBAL Site)

4010262
121004-00/00