

Meet

DINO 230VT

DINO® 3.5t VEHICLE-MOUNTED LIFT

Standard features in DINO 230VT:

- Cost-efficient in use and easy to drive with a B-class driver's license
- Three jacking options: narrow, wide and one-sided, automatic levelling
- Easy-entry basket with non-slip stairway
- Hydraulic basket rotation 180°
- Up to 3 simultaneous boom movements
- Home and memory functions as standard features
- DINO CAN-BUS control system: intuitive controls
- Bumper and cabin protection, auto-detect boom position
- Smooth transitions within the working envelope: operator comfort
- Rental proof: well-protected components
- Remote start/ stop from the basket
- Automatic variable load dependent engine RPM

Technical data

| | 230VT |
|-------------------------|------------------------------------|
| Max. working height | 23.00 m |
| Max. platform height | 21.00 m |
| Max. lateral outreach * | 15.1 m / 100 kg 11.3 m / 230 kg |
| Lifting capacity | 230 kg |
| Basket size | 0.7 x 1.4 m |
| Boom rotation | ±355° |
| Basket rotation | 180° |
| Vehicle length * | 7.75 m |
| Max. transport width* | 2.43 m |
| Vehicle width* | 2.26 m |
| Vehicle height * | 2.96 m |
| Total vehicle weight * | 3400 kg |
| Departure angle * | 9° |
| Support width | |
| - longitudinal | 3.9 m |
| - wide jacking | 3.2 m |
| - narrow jacking | 2.0 m |
| - one-sided jacking | 2.6 m |
| Boom control | CAN-BUS, proportional |
| Automatic levelling | std |
| Home function | std |
| Memory function | std |



*) with MB Sprinter chassis



Options available for DINO 230VT:

- LED flood working lights in the basket
- 12 V and USB power outlets in the basket
- Outrigger pads and brackets, 400 x 400 mm with a collar, including brackets for transport
- LED markers on each outrigger cover
- Insulated basket
- Tools and harness box in the vehicle frame
- Open top frame cargo area

Outreach

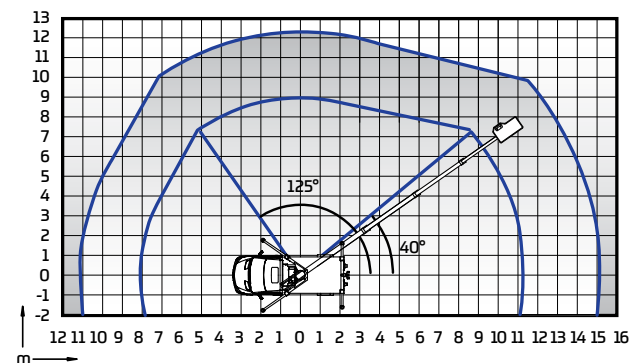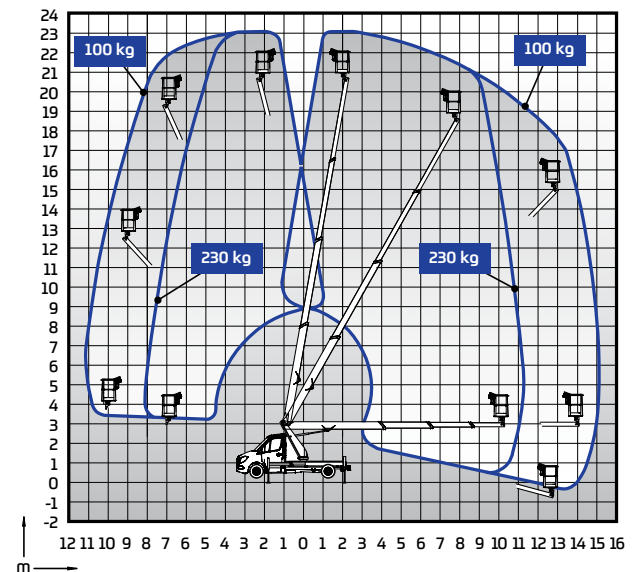

DINOLIFT

UP TO THE JOB

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 2.3.2021